

MULTIPURPOSE TRAILERS LIFTING TRAILERS



Trailer designed for the harvesting of dried fruit, but able to serve other needs. The intermediate platform works independently of the lower chassis, allowing a wide range of tipping.

CHARACTERISTICS


- Rear-hinged metal box
- Independent hydraulic circuits (box and lower chassis)
- Capacity 9m³
- Total technical mass 8t
- 400×80 hubs
- 385/65 R22.5 wheels as standard
- Useful tipping height 3.65m
- Tipping angle 57°



DRIED FRUITS



MISCELLANEOUS
SERVICES




OPTIONS

Wheels

- 425/65 R22.5
- 445/65 R22.5
- 550/60-22.5 16PR
- 560/60 R22.5

Stainless Steel Box

Food painting

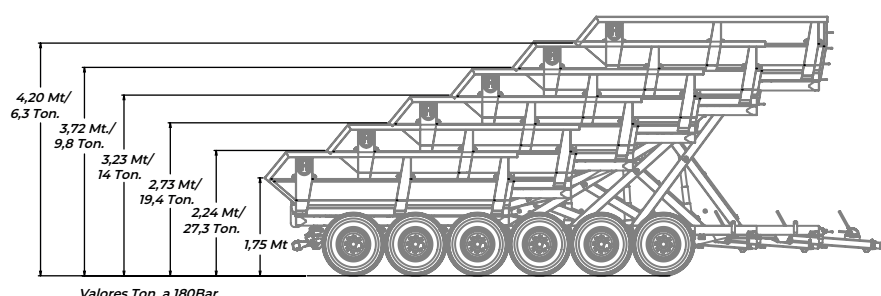

WHY CHOOSE HERCULANO PRODUCTS?

01

Over 50 years of experience

02

Produces equipment tailored to your needs

03

Field technical assistance (direct or through local partners)

04

Manuals and spare parts catalogue (to facilitate the parts exchange process)

05

24-month warranty

STANDARD PRODUCT S1EB 8000 ELV

Characteristics	Uni.	S1EB 8000 ELV
Box/Body (outside)	-	-
Length	m	4,60
Width	m	2,20
Height	m	1,00
Indicative empty weight	t	2,80
Total technical gross vehicle weight	t	10,00
GVRW ⁽¹⁾ on the axle(s) (≤ 40 Km/h)	t	8,00
GVRW ⁽¹⁾ on the drawbar	t	2,00
Capacity	m ³	9,00
Dimensions		
Interior of the box/body	-	-
Length	m	4,50
Width	m	2,10
Height	m	1,00
Total length	m	5,72
Total width	m	2,20
Total height	m	2,20
Platform height	m	1,20
Useful tipping height	m	3,65
Total tipping height	m	7,54
Suspension, axles and tyres		
Axle type	-	Fixed single axle
Axle square - (number of studs)	mm - (n.º)	90 - (8)
Braking hubs	mm	400 x 80
Axle track	mm	1750
Wheels	-	385/65 R22.5
Tipping details		
Tipping angle backwards/sides	-	57°
No. sections 1 st cylinder/2 nd cylinder	-	5 / 4
Tipping cylinder diameter/height	mm	127/1500 - 107/1700
Tipping cylinder - pressure/oil requirement	bar/l	180/2x 13,1 - 180/1x 11,6

⁽¹⁾ Gross Vehicle Weight Rating

INCREASINGLY VERSATILE...

For any equipment, we have several options available with which you can equip your standard product. In this case, we highlight the possibility of the stainless steel case and the various wheel options.

Follow us:

herculano.pt



Herculano, S.A.

Rua da Indústria, 3720-051 Loureiro
Oliveira de Azeméis, Portugal

General

E: herculano@ferpinta.pt
T: +351 256 661 900
M: +351 965 964 470
F: +351 256 692 497

Commercial

E: dep.comercial.herculano@ferpinta.pt
T: +351 256 661 913
F: +351 256 692 497